





# Set-up guide.

How to set up and place your Booster to improve a low Wi-Fi signal.

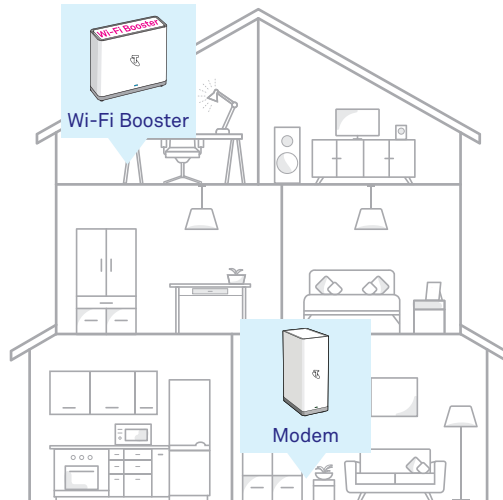

For use with Telstra's Smart Modems.

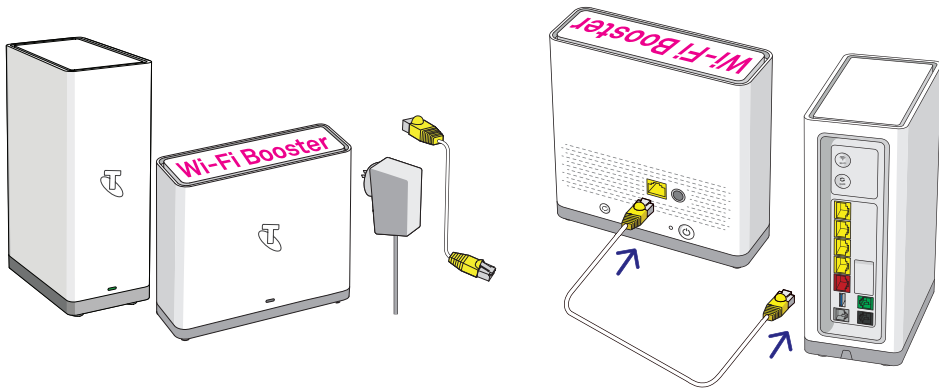

1

**Place the Wi-Fi Booster close to your Modem\*.**

This is so that the units can be paired before the Booster can be moved to the low Wi-Fi area in your home.



- Check that you have the Wi-Fi Booster, power adapter and yellow-ended cable.

\* Check your modem base for model details. If it is not the Telstra Gen 2 Smart Modem or DJA0230, contact Telstra.

2

**Connect the yellow-ended cable.**

- Insert one yellow end of the cable into the yellow port at the back of the Wi-Fi Booster.
- Insert the other yellow end into **any** of the yellow ports on the back of the Modem.

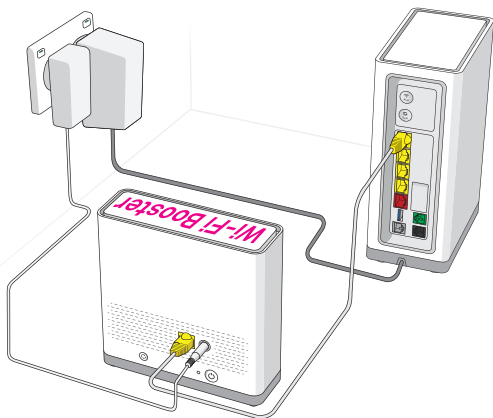

3

### Power up the Wi-Fi Booster.

- Plug the Booster power adapter into a power point so that your equipment is set up as per the diagram above.
- Switch the power point on.
- Check that there is now a light showing on the front of the Wi-Fi Booster.


If there is no light, press the power button on the lower back corner of the unit (refer to diagram on the Troubleshooting page for its location).

4

### Wait for the pairing process to complete.

- The light on the front of the unit will change colour during the process.
- The light will pulse between **purple** and **blue** when starting up.
  - The light will turn a **solid blue** after 3 minutes.

**Wait an additional 2 minutes after the solid blue light appears** to ensure that the pairing process is complete.




5

### Get ready to move.

The Wi-Fi Booster is now paired and ready to be moved to its new location in your home.

- Unplug the Wi-Fi Booster power adapter.
- Detach the yellow-ended cable from both units.

You will not need to use the yellow-ended cable again during this set-up process. Store it somewhere safe as you will need it again if the units need to be paired in the future.

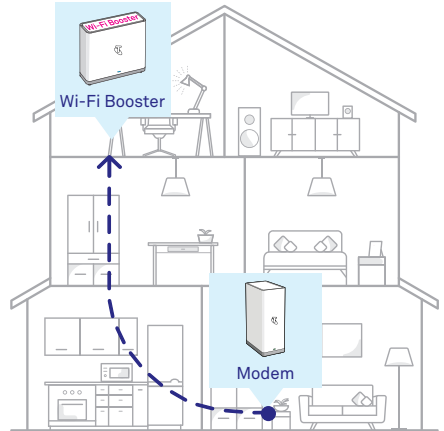

6

### Move the Wi-Fi Booster to its new location where the Wi-Fi signal is low.

- Plug the Wi-Fi Booster into a power point and switch the power on.
- Watch the light on the front of the unit. The light should pulse between **purple** and **blue**, and will then settle to the **solid blue** light within 3 minutes.





Refer to the Troubleshooting page if the light shows amber and not solid blue. This means that the Wi-Fi Booster has been moved too far away from the Modem.

Set-up is now complete. Enjoy the improved Wi-Fi service!


# Troubleshooting Tips.

## What does my Wi-Fi Booster light mean?

---

 <b>Solid Blue</b>	<b>The set-up has been successful.</b> You have a strong connection back to your Modem.
 <b>Purple</b>	<b>The software is updating, pairing or starting up.</b> Keep the device switched on and wait 5 minutes for the light to turn <b>solid blue</b> . If the <b>purple</b> start-up light does not change colour, press the Wi-Fi Booster power button* to switch it off. Wait 30 seconds and turn it back on to complete updates.
 <b>Amber</b>	<b>A poor signal.</b> The Wi-Fi Booster is too far away from the Modem. Simply move the Wi-Fi Booster closer to the Modem until you succeed in getting the <b>solid blue</b> light.  This step may involve some trial and error until you find the right spot.
 <b>Red</b>	<b>No connection to the Modem.</b> Press the power button* to switch the unit off, wait 30 seconds and turn it back on again to complete updates. If the red light reappears, repeat Steps 1–6 from the set-up process to pair the Modem with the Wi-Fi Booster.
<b>No light</b>	<b>No power source or the Wi-Fi Booster unit is not switched on.</b> Check that the power adapter is plugged into a working power point and switched on. If there is still no light showing, push the power button at the back of the Wi-Fi Booster.

---



\*The power button is located on the back of the Wi-Fi Booster.



## Need more help?



Visit [telstra.com/smartwifi](https://telstra.com/smartwifi) for more information, answers to frequently asked questions or for Live Chat with a Telstra consultant



Call us on **13 22 00**